
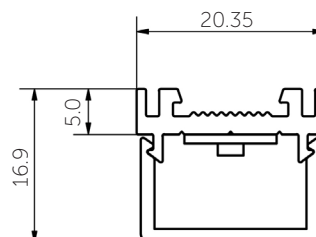


Sideways Sally 5R

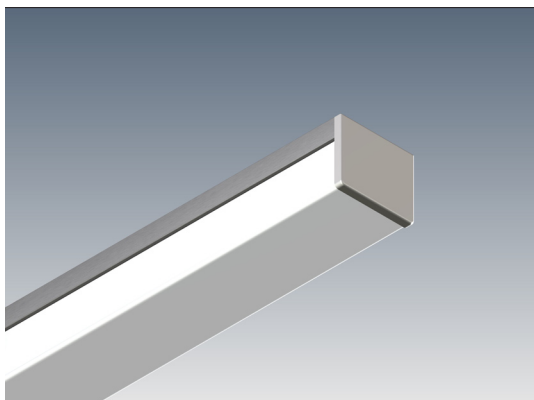

Sideways Sally 5R has many uses as a surface mounted profile solution, whether it is used as a slim-line mirror light in a bathroom, discrete task lighting under a shelf or tucked into a pelmet. With diffuser options of both curved and rectangular, this profile is sure to be a great addition to any specifier's tool kit.

MOUNTING OPTIONS

Surface mounted

DIFFUSER OPTIONS


Satin

SUPER SERIES LED STRIP OPTIONS

Lumens per metre	Watts per metre	Colour temp.
310lm	3W	2700K
330lm		3000K
345lm		4000K
760lm	7W	2700K
800lm		3000K
840lm		4000K
1520lm	14W	2700K
1600lm		3000K
1680lm		4000K

- LED strip options vary depending on region – please consult your local distributor for more information. Other LED strip options are available on request, including IP54 and IP67.
- All lumen values refer to the bare LED strip. Losses through diffuser/profile are not represented. Consult photometric data.
- 5 year manufacturer's warranty on Super Series & Spec Series LED strip.

ACCESSORIES



JMC-12
Joinery mounting clip



JN-ST
Straight joiner




JN-90
90 degree joiner



MB-ADJ
Adjustable mounting bracket

ADDITIONAL INFORMATION

Applications	Mirror lighting, kitchen joinery, display shelving.
Installation	Interior or exterior (with IP67 rated LED strip).
Materials	Extruded aluminium body, PMMA diffuser, AES plastic end caps.
Finish	Natural silver anodised or custom powder coat.
Light source	LED ribbon strip.
Power supply	24V DC - remote driver options ranging from 6W up to 320W.
Dimmable	Various options available, please enquire.

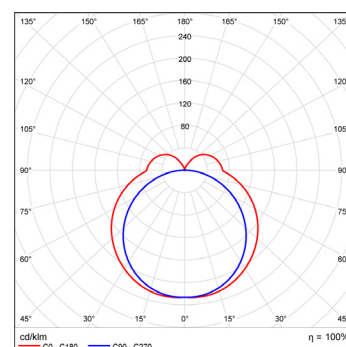

Polar curve for 1340 lumen LED strip with satin diffuser.

