

Spec Series General LED Strip is a cost-effective range of specification-level LED strip. High CRI and high R9 values provide rich, accurate colours and IP67 versions allow it to be used in bathrooms or exterior applications.

Our general-purpose LED strip is a cost-effective solution for an array of interior and exterior uses including joinery.

24V
DC

5 YR
WARRANTY*

3SDCM


R9
50+

RA
90+

CODE	WATTS P/M	COLOUR	LUMENS P/M	LEDS P/M	LED PITCH	CUTTING LENGTH	MAX. RUN PER FEED	PROTECTION
SPEC-9.6-30	9.6W	3000K	700	120	8.3mm	50.00mm	5M	IP20, IP67
SPEC-9.6-40		4000K	720					
SPEC-14.4-30-140	14.4W	3000K	1150	140	7.14mm	50.00mm	5M	IP20, IP67
SPEC-14.4-40-140		4000K	1180					
SPEC-15-30	15W	3000K	1425	126	7.94mm	50.00mm	5M	IP20, IP67
SPEC-15-40		4000K	1500					

For IP67 versions, add "-IP67" to end of codes above. Example code: SPEC-14.4-30-140-IP67.
IP67 versions reduce above stated lumen figures by 5%.
Wattage and lumen tolerance +/- 10%. Colour temperature tolerance +/- 5%.

SPEC-9.6-30 / SPEC-9.6-40

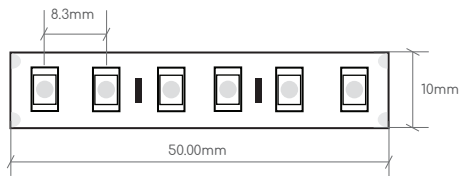


IP20 dimensions:
W10 x H2mm



IP67 dimensions:
W12 x H5mm
End Caps: W14 x H7mm

SPEC-14.4-30-140 / SPEC-14.4-40-140

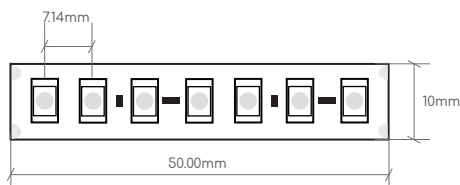


IP20 dimensions:
W10 x H1mm



IP67 dimensions:
W12 x H5mm
End Caps: W14 x H7mm

SPEC-15-30 / SPEC-15-40

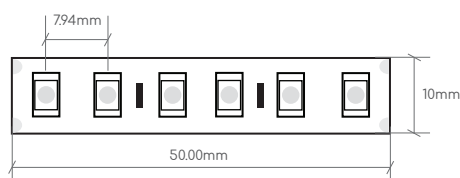

IP20 dimensions:
W10 x H1mm



IP67 dimensions:
W12 x H5mm
End Caps: W14 x H7mm

*Warranty applies only when mounted in an appropriate Offspring Profiles's extrusion.

ADDITIONAL INFORMATION

Input voltage: 24V DC
Spec Series General strip is supplied in 5m rolls.

Source life: L70 = 50,000 hours
Backing: 3M tape.

Control: Dimmable by PWM
Beam angle: 120°