

Spec Series Wide LED strip provides a high lumen output and wider distribution of light thanks the double row of LED chips. Perfect for use with our 'Downhill Dan 30', 'Downhill Dan 35', 'Flat Freddie 35' or 'Bob Each Way 65' profiles.

Spec Series Wide is a perfect companion for our wider profiles. The dual-row of LED chips offers a wide distribution of light across wide diffusers.

24V
DC

5 YR
WARRANTY*

3SDCM


R9
50+

RA
90+

CODE	WATTS P/M	COLOUR	LUMENS P/M	LEDS P/M	LED PITCH	CUTTING LENGTH	MAX. RUN PER FEED	PROTECTION
SPEC-28-30-240	28W	3000K	1990	240	8.3mm	50.00mm	5M	IP20
SPEC-28-40-240		4000K	2050					

Wattage and lumen tolerance +/- 10%. Colour temperature tolerance +/- 5%.

SPEC-28-30-240 / SPEC-28-40-240

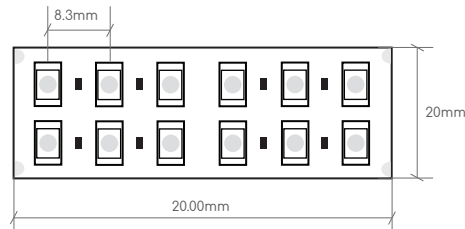

IP20 dimensions:
W20 x H1mm

*Warranty applies only when mounted in an appropriate Offspring Profiles's extrusion.

ADDITIONAL INFORMATION		
Input voltage: 24V DC Spec Series Wide strip is supplied in 5m rolls.	Source life: L70 = 50,000 hours Backing: 3M tape.	Control: Dimmable by PWM Beam angle: 120°